

The tire that defined self-expression in the muscle-car era, now updated for a new millennium. Wide competition look. Low profile. Enhanced control.

Benefits:


- T/A** • Superb lateral stability and steering response
- T/A** • Exceptional wet traction and control while maintaining dry traction; long, even wear
- T/A** • Genuine all-season traction and performance-ensured
- T/A** • Crisp handling

- High performance with low noise levels
- Choice of distinctive white letters on one sidewall and black on the other; styling to complement any vehicle
- S-speed rated; capable of speeds up to 180 km/h†

Features:

- g-Wedge™ technology advanced sidewall stabilizer
- Durable tread compounding and variable groove angle geometry
- M&S rated
- Polyester/steel/nylon (50 series only) construction ensures maximum carcass strength
- Unique tread block phasing
- Raised white and enhanced black sidewall graphics



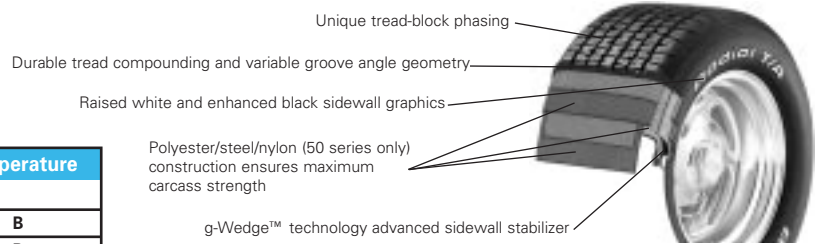

UTQG RATING:

Description	Treadwear	Traction	Temperature
Radial T/A®			
13-inch sizes	360	A	B
14-, 15-, 16-inch sizes	400	A	B

Polyester/steel/nylon (50 series only) construction ensures maximum carcass strength

g-Wedge™ technology advanced sidewall stabilizer

T/A Denotes a Traction/Advantage Benefit

Tire Size	Serv. Desc.	Sidewall	MSPN	Stock #	Rim Width Range (inches)	*Section Width on Measuring Rim Width**	*Overall Diameter	Tread Depth (in/32nds)	Revs/Mile at 45 mph	Max Load (lbs@psi)
P175/70R13	82S	RWL	46604	285-308	4.5 - 6.0	7.0 on 5.0	22.7	12.0	916.0	1036@35
P195/60R13	83S	RWL	81573	265-305	5.5 - 7.0	7.9 on 6.0	22.2	11.0	937.0	1080@35
P205/60R13	86S	RWL	55222	265-309	5.5 - 7.5	8.2 on 6.0	22.7	11.0	916.0	1179@35
P215/50R13	84S	RWL	91781	275-307	6.0 - 7.5	8.9 on 7.0	21.5	11.0	967.0	1091@35
P185/70R14	87S	RWL	50618	285-410	4.5 - 6.0	7.4 on 5.5	24.3	12.0	856.0	1201@35
P195/70R14	90S	RWL	48578	285-413	5.0 - 6.5	7.9 on 6.0	24.8	12.0	839.0	1312@35
P205/70R14	93S	RWL	66748	285-416	5.0 - 7.0	8.2 on 6.0	25.4	12.0	819.0	1433@35
P215/70R14	96S	RWL	50228	285-420	5.5 - 7.0	8.7 on 6.5	25.9	12.0	803.0	1554@35
P225/70R14	98S	RWL	79604	285-459	6.0 - 7.5	9.0 on 6.5	26.5	12.0	785.0	1675@35
P195/60R14	85S	RWL	84497	265-402	5.5 - 7.0	7.9 on 6.0	23.2	11.0	897.0	1135@35
P215/60R14	91S	RWL	98659	265-418	6.0 - 7.5	8.7 on 6.5	24.2	11.0	860.0	1345@35
P225/60R14	94S	RWL	53273	265-434	6.0 - 8.0	9.0 on 6.5	24.7	11.0	842.0	1455@35
P235/60R14	96S	RWL	79644	265-477	6.5 - 8.5	9.5 on 7.0	25.1	11.0	829.0	1565@35
P245/60R14	98S	RWL	54322	265-486	7.0 - 8.5	9.8 on 7.0	25.6	11.0	813.0	1675@35
P245/50R14	93S	RWL	48000	275-536	7.0 - 8.5	10.0 on 7.5	23.7	11.0	878.0	1433@35
P265/50R14	98S	RWL	91337	275-559	7.5 - 9.5	10.9 on 8.5	24.5	11.0	849.0	1642@35
4Q- P155/80R15	83S	RWL	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD
P215/70R15	97S	RWL	72634	285-639	5.5 - 7.0	8.7 on 6.5	26.9	12.0	773.0	1620@35
P225/70R15	100S	RWL	67244	285-523	6.0 - 7.5	9.0 on 6.5	27.4	12.0	759.0	1753@35
P235/70R15	102S	RWL	61977	285-543	6.0 - 8.0	9.5 on 7.0	28.0	12.0	743.0	1896@35
P255/70R15	108S	RWL	45982	285-561	6.5 - 8.5	10.2 on 7.5	29.1	12.0	715.0	2183@35
P285/70R15	115S	RWL	75701	285-145	7.5 - 9.5	11.3 on 8.5	30.8	12.0	675.0	2679@35
P215/65R15	95S	RWL	78624	265-587	6.0 - 7.5	8.7 on 6.5	26.0	10.5	800.0	1510@35
P195/60R15	87S	RWL	64472	265-487	5.5 - 7.0	7.9 on 6.0	24.2	11.0	860.0	1190@35
P205/60R15	90S	RWL	71072	265-515	5.5 - 7.5	8.2 on 6.0	24.7	11.0	842.0	1301@35
P215/60R15	93S	RWL	67797	265-510	6.0 - 7.5	8.7 on 6.5	25.2	11.0	825.0	1411@35
P225/60R15	95S	RWL	64148	265-534	6.0 - 8.0	9.0 on 6.5	25.6	11.0	813.0	1521@35
P235/60R15	98S	RWL	54712	265-531	6.5 - 8.5	9.5 on 7.0	26.1	11.0	797.0	1642@35
P245/60R15	100S	RWL	60013	265-552	7.0 - 8.5	9.8 on 7.0	26.6	11.0	782.0	1753@35
P255/60R15	102S	RWL	71728	265-562	7.0 - 9.0	10.2 on 7.5	27.1	11.0	768.0	1885@35
P275/60R15	107S	RWL	45185	265-564	7.5 - 9.5	11.0 on 8.0	28.0	11.0	743.0	2149@35
P205/55R15	87S	BSW	88561	270-321	5.5 - 7.5	8.4 on 6.5	23.9	11.0	870.0	1201@35
P265/50R15	99S	RWL	88000	275-744	7.5 - 9.5	10.9 on 8.5	25.5	11.0	816.0	1720@35
P275/50R15	101S	RWL	50381	275-771	7.5 - 9.5	11.2 on 8.5	25.9	11.0	803.0	1830@35
P295/50R15	105S	RWL	53415	275-777	8.0 - 10.0	12.2 on 9.5	26.7	11.0	779.0	2061@35
P275/65R16	111S	RWL	93892	265-240	7.5 - 9.5	11.0 on 8.0	30.1	10.5	691.0	2403@35
4Q- P265/60R16	106T	RWL	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD
4Q- P285/60R16	111T	RWL	93229	TBD	TBD	TBD	TBD	TBD	TBD	TBD
P205/55R16	89S	BSW	70523	270-365	5.5 - 7.5	8.4 on 6.5	24.9	11.0	835.0	1279@35
P195/50R16	83S	BSW	60277	270-555	5.5 - 7.0	7.9 on 6.0	23.7	11.0	878.0	1074@35
P205/50R16	86S	BSW	89159	270-222	5.5 - 7.5	8.4 on 6.5	24.1	11.0	863.0	1168@35
P225/50R16	91S	BSW	67125	270-250	6.0 - 8.0	9.2 on 7.0	24.9	11.0	835.0	1367@35
P245/50R16	96S	BSW	53281	270-803	6.5 - 8.5	10.0 on 7.5	25.7	11.0	809.0	1576@35
P265/50R16	101S	BSW	66711	270-229	7.5 - 9.5	10.9 on 8.5	26.5	11.0	785.0	1797@35
P295/50R16	107S	BSW	51487	270-239	8.0 - 10.0	12.2 on 9.5	27.6	11.0	754.0	2149@35

*The dimensions shown are average values for tires measured on the specified measuring rim width. Individual tires may vary from data shown.

**Section width varies approximately 0.2" (5mm) for every 0.5" change in rim width.

WARNING: Serious or fatal injury may result from improper mounting, from underinflation or overloading, or from tire damage due to abusive use. For proper mounting, see tire dealer. For proper operation, consult Tire Information Placard in vehicle. For high-speed driving, additional inflation pressure and possibly reduced tire loading and/or upsizing is required. In the absence of specific recommendations by the vehicle manufacturer, use the following guidelines based on those in the *European Tyre and Rim Technical Organization Standards Manual*.

†For speeds over 160 km/h, load and inflation MUST be adjusted according to the table below.

MAXIMUM SPEED km/h	160	170	180
INFLATION INCREASE psi	0	1	2
LOAD CAPACITY (% of max)	100	100	100

Inflation pressure increase must not exceed the maximum pressure branded on the tire sidewall. When a consumer requests a replacement tire with a lower speed rating than the original equipment tire, you must clearly communicate to him or her that the handling of the vehicle may be different and that its maximum speed capability is limited to that of the lowest speed rated tire on the vehicle. Exceeding the lawful speed limit is neither recommended nor endorsed. Estimated data subject to change for all sizes. **New** New sizes and preliminary data subject to change. New size availability noted by Quarter, i.e., 1Q.